




# LOW-LOADER TRAILER




**INNO**MADE  
Made in Germany

## Model Overview

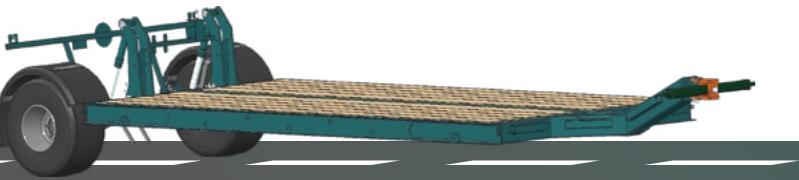

Platform Length 500 cm ◊ Maximum Trailer Load 6.370 kg

**PFW 500**

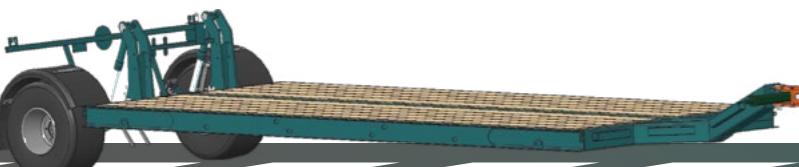

Platform Length 600 cm ◊ Maximum Trailer Load 6.270 kg

**PFW 600**

# Vesatility meets Functionality

The **INNO<sup>MADE</sup>** low-loader trailer is specially designed for the safe transport of extra-wide agricultural machinery and tall goods. Its torsion-resistant ladder frame with central tube and Cat. III lower link hitch ensure a stable connection to the tractor.

Versatile equipment options and extensions allow the platform trailer to be flexibly adapted to individual application requirements. The particularly low loading height makes loading and unloading much easier, thus contributing to efficient workflows.



## Technical Details

The towing device allows a maximum steering angle of 90°, making tight turning maneuvers easy. It is optionally available in a removable version, also in combination with ramps. This facilitates complicated loading and unloading processes.

The integrated lower link crossbar provides even better maneuverability, allowing pendulum movements of  $\pm 20^\circ$  and thus ensuring stable and safe driving even on uneven terrain.




- hydraulically height-adjustable platform
  - > 18 cm loading height
  - > 40 cm maximum ground clearance
- shut-off valves on the hydraulic cylinders of the chassis prevent unintentional lowering
- LED rear lights as standard
- unbraked as standard, optionally available with air brake system, four-stage manual brake force regulator, and fenders for 40 km/h approval






The loading area of the **INNOMADE** low-loader trailer consists of 3 cm thick solid wood planks and is suitable for a wide variety of transport goods. To secure the load, the lashing eyes included in the scope of delivery can be attached to the designated fixtures on the main frame.

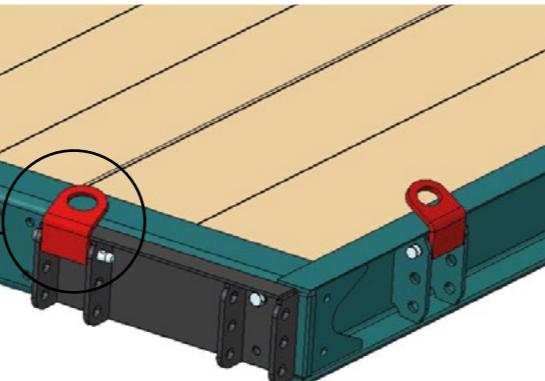


## Equipment Options

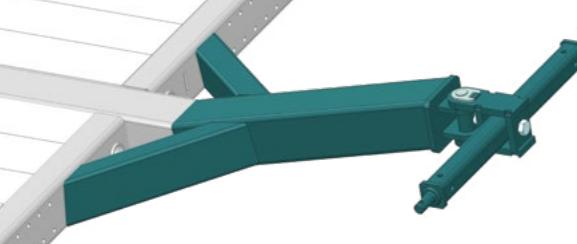


### Cat. III Hitch – rigid

- attachment height, PFW lowered: 420 mm

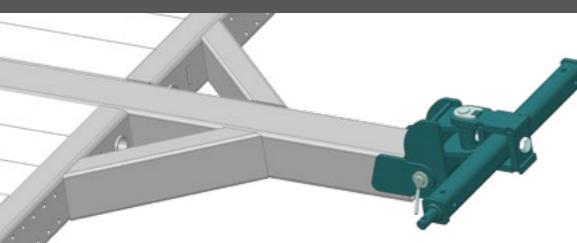

### Cat. III Hitch – detachable

- attachment height, PFW lowered: 405 mm

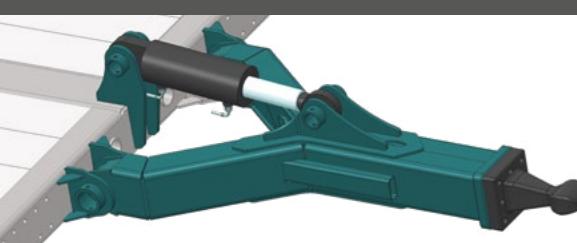


### Pulling Device K80

- maximum attachment height: 730 mm at 25°
- 1 x double-acting control unit required


### Fixed, Foldable Access Ramps

- 120 mm laterally adjustable when lowered
- length 1.700 mm

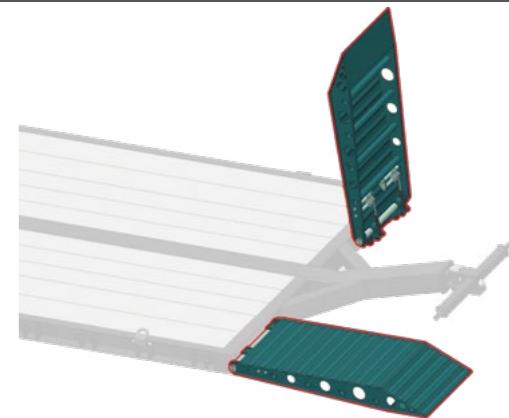


### Removable Access Ramps

- transport position in front of the axle
- can be attached on the side and front
- length 1.500 mm

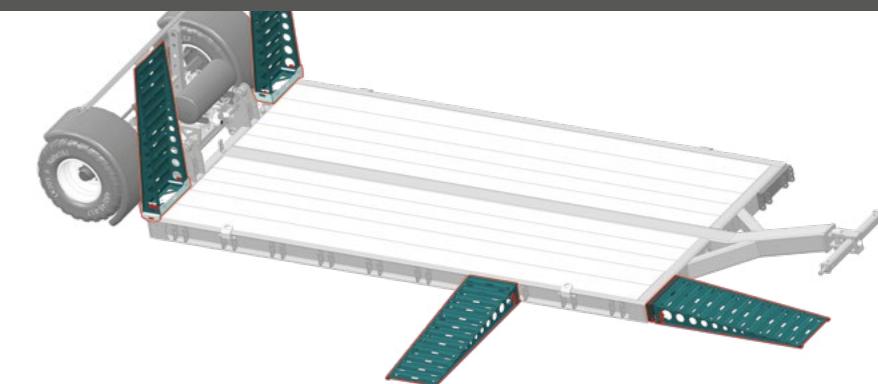


## Equipment Options & Technical Data

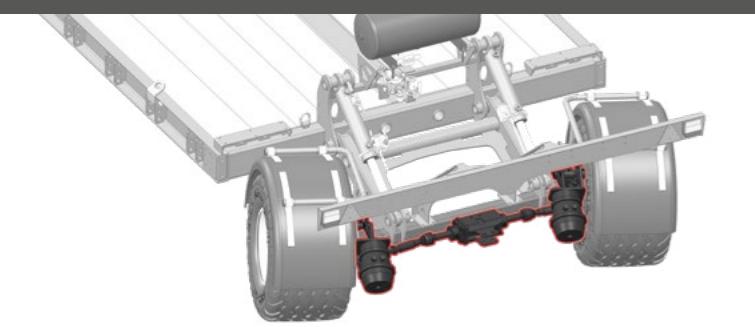

### Steering Axle

- Zwangslenkung bei Unterlenkeranhängung starr und abnehmbar
- Zwangslenkung bei K80-Anhängung
- elektro-hydraulische Lenkung (auf Anfrage)

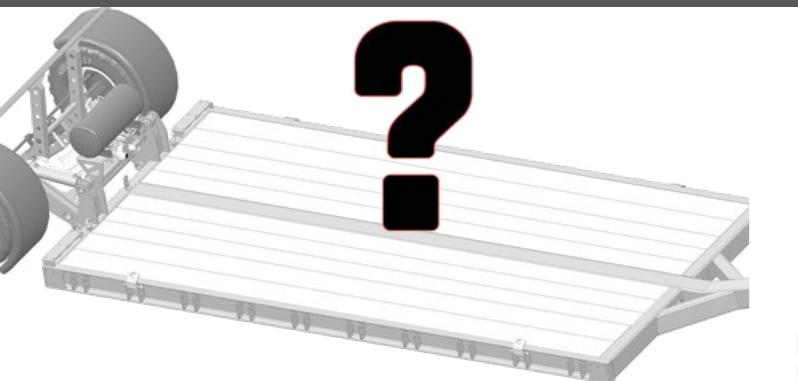

### Customizations

- gates for livestock transport
- bale grids
- stake frames
- mountings for overseas containers

**Do you have other ideas? We will implement them.  
Please contact us.**

Model	PFW 500		PFW 600			
	Cat. III rigid	Cat. III detachable	K80	Cat. III rigid	Cat. III detachable	K80
Towing Device						
Length [cm]	780		800	880		900
Width [cm]			250			
Platform Length [cm]		500		600		
Empty Weight [kg]	1.950		2.100	2.050		2.200
Maximum Load [kg]	6.370		5.150	6.270		4.900
Max. permissible total Weight [kg]	8.320		7.250	8.320		7.100
Axle Load [kg]	4.800		4.250	4.800		4.100
Drawbar Load [kg]	3.520		3.000	3.520		
Equipment Options & Weights [kg]   Please note: Equipment Options change the maximum possible Load!						
Ait Brake for 40 km/h Approval					✓	
Fenders for 40 km/h Approval					✓	
Steering Axle with forced Steering	200	–	–	200	–	–
Steering Axle with electro-hydr. Steering Gear	120	–	120	120	–	120
Folding Access Ramps	200	200	200	200	200	200
Removable Access Ramps	70	70	70	70	70	70
Ballengitter	120	120	120	120	120	120



# INNO MADE

A brand of **EIDAM Agrarsystem GmbH**

Made in Germany

**EIDAM**  
AGRARSYSTEM

Eidam Agrarsystem GmbH • Kühnhaider Straße 8, 08294 Lößnitz • Tel.: +49 3771 56 420-30 • [info@eidam-agrarsystem.de](mailto:info@eidam-agrarsystem.de) • [www.eidam-agrarsystem.de](http://www.eidam-agrarsystem.de)

Some of the products in this brochure are shown with special equipment. Subject to change - all rights reserved. This brochure is the property of Eidam Agrarsystem GmbH. Resale prohibited. 10/2025

